

ELC12-7 (12V 7Ah)

Specifications

Nominal Voltage	12V	
Nominal Capacity(20 Hr)	7Ah	
Dimension	Length	151±2mm(5.95 inches)
	Width	65±1mm(2.56 inches)
	Containeriner Height	93.5±1mm(3.68 inches)
	Total Height (With terminal)	99±1mm(3.90 inches)
Approx Weight	Approx2.03kgs(4.48 lbs)	
Design life	5 years	
Terminal	F1/F2	
Container Material	ABS	
Rated Capacity	7.0Ah/0.35A	(20hr, 1.75V/Cell, 25 °C/77°F)
	6.6Ah/0.66A	(10hr, 1.80V/Cell, 25 °C/77°F)
	6.3Ah/1.25A	(5hr, 1.75V/Cell, 25 °C/77°F)
	4.5Ah/4.57A	(1hr, 1.60V/Cell, 25 °C/77°F)
Max. Discharge Current	105A(5s)	
Internal Resistance	Appro≤22.0mΩ	
Operating Temp. Range	Discharge: -20 °C~50 °C	
	Charge: -20 °C~50 °C	
	Storage: -20 °C~50 °C	
Nominal Operating Temp. Range	25±3 °C(77±5°F)	
Cycle Use	Initial Charging Current Less than 2.1A. Voltage 14.4V-15.0V at 25 °C(77°F) Temp. Coefficient-20mV/C	
Standby Use	No limit on Intital Charging Current Voltage 13.5V-13.8V at 25 °C(77°F) Temp. Coefficient-20mV/C	
Capacity affected by Temperature	40 °C(104°F)	103%
	25 °C(77°F)	100%
	0 °C(32°F)	86%
Self Discharge	ELC series batteries may be stored for up to 6 months at25 °C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Application

- ♦ All purpose
- ♦ Uninterruptable Power Supply(UPS)
- ♦ Electric Power System(EPS)
- ♦ Emergency backup power supply
- ♦ Emergency light
- ♦ Railway signal
- ♦ Aircraft signal
- ♦ Alarm and securitysystem
- ♦ Electronic apparatus & equipment
- ♦ Communication power supply
- ♦ DC power supply
- ♦ Auto controlsystem

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	27.94	18.32	13.45	7.98	5.82	4.57	2.89	1.98	1.32	0.89	0.70	0.370
1.67V	26.62	17.56	13.16	7.85	5.73	4.42	2.84	1.94	1.30	0.87	0.69	0.363
1.70V	25.50	16.60	12.98	7.75	5.66	4.28	2.78	1.91	1.27	0.85	0.68	0.357
1.75V	24.30	15.83	12.29	7.49	5.51	4.15	2.73	1.87	1.25	0.84	0.67	0.350
1.80V	22.44	14.75	11.47	7.19	5.33	4.03	2.63	1.80	1.20	0.82	0.66	0.346




Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	52.03	35.16	26.00	15.53	11.36	8.99	5.67	3.91	2.62	1.77	1.40	0.738
1.67V	49.86	33.74	25.50	15.31	11.21	8.68	5.57	3.83	2.56	1.74	1.39	0.727
1.70V	47.81	31.91	25.21	15.14	11.10	8.37	5.47	3.76	2.52	1.72	1.38	0.718
1.75V	45.80	30.47	23.92	14.68	10.83	8.06	5.37	3.69	2.47	1.70	1.36	0.703
1.80V	42.70	28.49	22.36	14.14	10.50	7.75	5.15	3.55	2.38	1.66	1.34	0.700


ELC12-7 (12V 7Ah)

Dimensions


■ F1 Terminal
Unit: mm [inches]

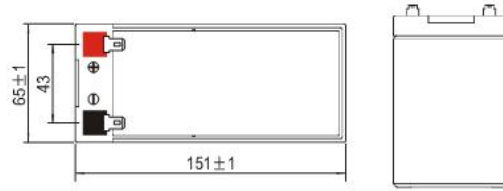


Discharge Characteristics

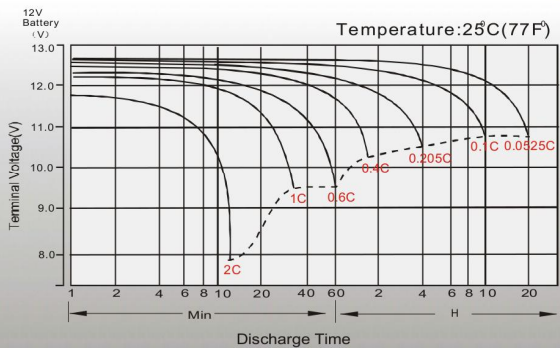


Float Charging Characteristics

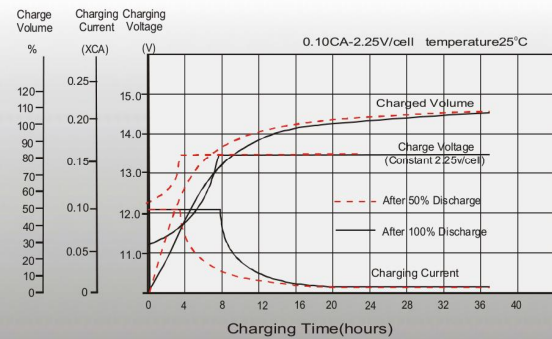


Temperature Effects in Relation to Battery Capacity

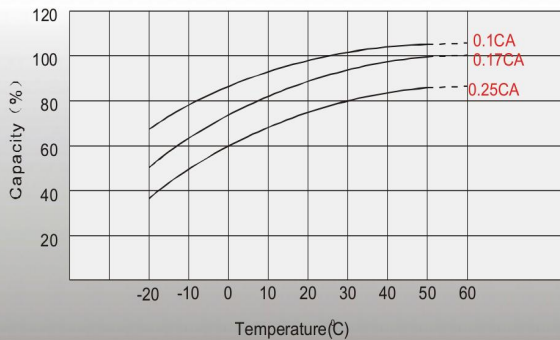


Effect of Temperature on Long Term Float Life

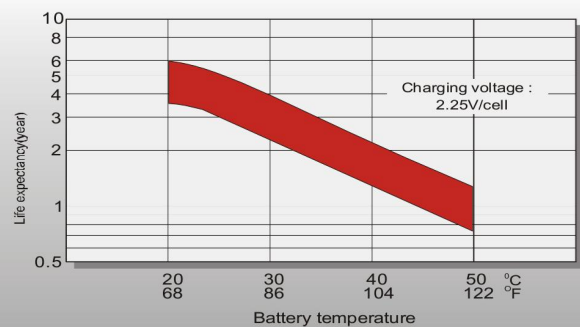

Cycle life in Relation to Depth of Discharge

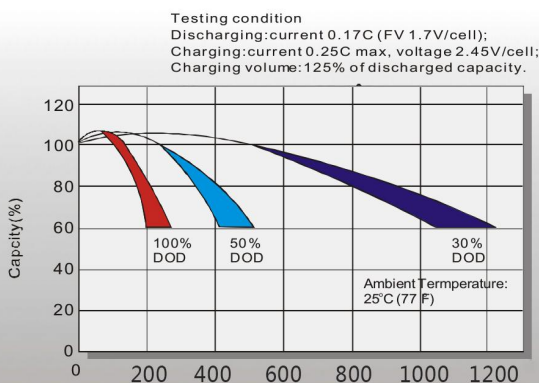

Self-discharge Characteristics

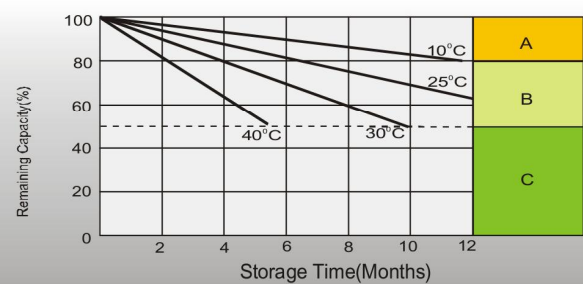

- A** No supplementary charge required.
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.